


Upon opening, the door panels stack safely and compactly behind the lintel where they are protected. Lighting devices, lifting platforms and other fittings on the ceiling are not impaired.

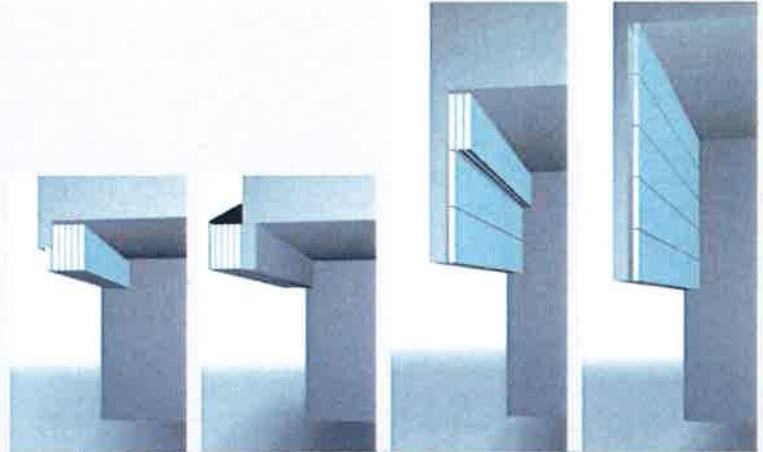

Installation with lintel cover

Outside installation

Extended guide tracks

Vertical lifting door

For applications with limited space various installation options are available.



We offer fibreglass in three colours: "Brilliant", "Emerald-green" and "Sapphire-blue".



Interesting and unique designs can be achieved by incorporating laminated pictures into the fibreglass.

The twin-walled design of the fibreglass element enables excellent thermal insulation; a complete seal prevents unnecessary energy loss and draught.

The robust door material is resistant and absorbs impact. Our stacking doors are weather and corrosion resistant, making them suitable for harsh environments.